


01



Yüksek Tavan Armatürleri T5 Fluorescent Highbay Luminaires



Yüksek Tavan Armatürü (2)
T5 Fluorescent Highbay Luminaires

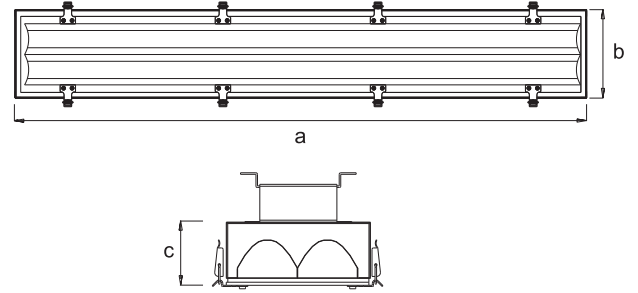


Armatür Özellikleri

- Gövde : Elektrostatik toz boyalı metal
- Reflektör : 0,40 mm %99 saflıkta anodize alüminyum
- Balast : EN 61347-2-3
- Duy : EN 60400
- Cam : Temperli cam
- Kablo : 1 mm NYA
- Boya : Elektrostatik toz boya


Specifications

- Body : Electrostatic powder coated sheet
- Reflector : 0,40 mm 99% pure anodised aluminium
- Ballast : EN 61347-2-3
- Base : EN 60400
- Diffuser : Tempered glass
- Cable : 1 mm NYA
- Coating : Electrostatic powder coating

Kod No Code No	Güç Power (w)	Lamba Tipi Lamp Type	Işık Akışı Luminous Flux (lm)	Akım Current (A)	Boyutlar Dimensions (mm)			Ağırlık Weight (Kg)	Hacim Volume (m³)	Duy Base	Koli Adedi Pcs / Pack
					a	b	c				
5014-486	2x14	TL5 14	2x1220	0,16	610	190	82	3,00	0,0110	G5	1
5014-296	2x28	TL5 28	2x2580	0,28	1210	190	82	7,50	0,0217	G5	1
5014-487	2x35	TL5 35	2x3430	0,34	1510	190	82	9,00	0,0270	G5	1
5014-488	2x80	TL5 80	2x6150	0,72	1210	190	82	7,50	0,0217	G5	1
5014-297	2x54	TL5 54	2x4450	0,54	1210	190	82	7,50	0,0217	G5	1

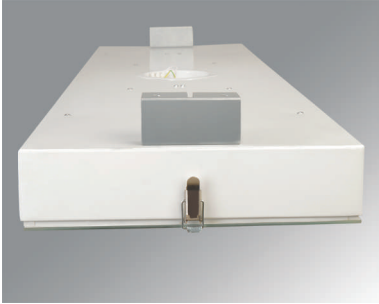

Yüksek Tavan Armatürü (4)
T5 Fluorescent Highbay Luminaires

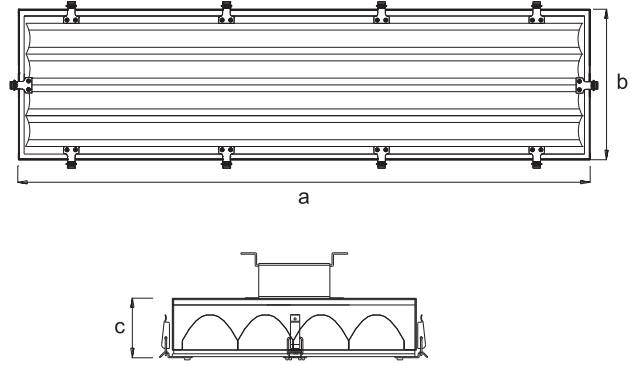

Armatür Özellikleri

- Gövde : Elektrostatik toz boyalı metal
- Reflektör : 0,40 mm %99 saflıkta anodize alüminyum
- Balast : EN 61347-2-3
- Duy : EN 60400
- Cam : Temperli cam
- Kablo : 1 mm NYA
- Boya : Elektrostatik toz boya

Specifications

- Body : Electrostatic powder coated sheet
- Reflector : 0,40 mm 99% pure anodised aluminium
- Ballast : EN 61347-2-3
- Base : EN 60400
- Diffuser : Tempered glass
- Cable : 1 mm NYA
- Coating : Electrostatic powder coating

Kod No Code No	Güç Power (w)	Lamba Tipi Lamp Type	Işık Akışı Luminous Flux (lm)	Akım Current (A)	Boyutlar Dimensions (mm)			Ağırlık Weight (Kg)	Hacim Volume (m³)	Duy Base	Koli Adedi Pcs / Pack
					a	b	c				
5014-494	4x14	TL5 14	4x1220	0,34	610x345x82			7,00	0,0198	G5	1
5014-298	4x28	TL5 28	4x2580	0,60	1210x345x82			12,00	0,0384	G5	1
5014-495	4x35	TL5 35	4x3430	0,68	1510x345x82			14,00	0,0478	G5	1
5014-496	4x80	TL5 80	4x6150	1,44	1510x345x82			12,00	0,0478	G5	1
5014-299	4x54	TL5 54	4x4450	1,08	1210x345x82			12,00	0,0384	G5	1

